



GILLESPIES

CRANE SERVICES

RK200

Rough Terrain Mobile Crane

Max. Lifting Capacity: **20.0 metric tonne at 2.5 m**

Max boom Length: **30.5 m**

RATED CAPACITY

20 Tonnes at 2.5m radius

1 Tonne at 18m

Max Outrigger Base

5.30 m x 5.10 m

AXLE LOADING

Front Axle 9,620 kg

Rear Axle 9,915 kg

Gross Vehicle Weight

19,585 kg

TURNING CIRCLE

Outside Wheels 6.20 metres


4 wheel Steer - 4WD

Width 2.50 m

Overall Length 8.15 m

Height 3.40 m

This 4WD highly manoevrable crane is ideal for tight sites that require extra manoevrability

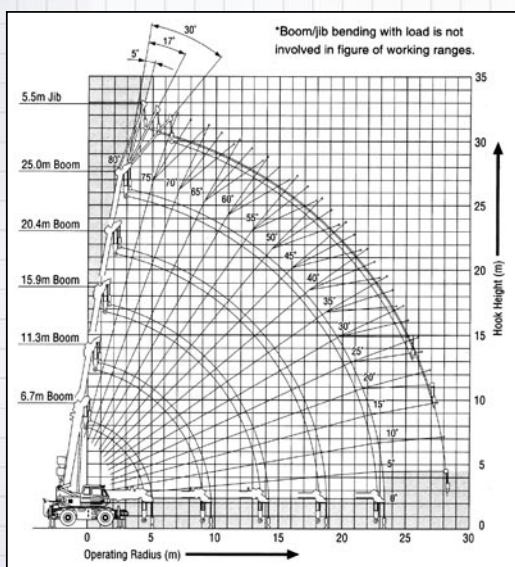

MAIN	With outriggers in 5.1m position				
	360° swing area				
	Boom length in metres				
Operating radius (m)	6.7	11.3	15.9	20.4	25.0
2.5	20.00	12.00	9.00	7.00	
3.0	16.00	12.00	9.00	7.00	
3.5	14.00	12.00	9.00	7.00	5.00
4.0	12.50	12.00	9.00	7.00	5.00
4.5	11.50	11.10	8.50	7.00	5.00
5.0		10.25	8.05	7.00	5.00
5.5		9.40	7.60	6.60	4.75
6.0		8.55	7.15	6.20	4.55
6.5		7.70	6.70	5.80	4.35
7.0		6.85	6.20	5.50	4.15
7.5		6.00	5.70	5.15	3.90
8.0		5.30	5.20	4.85	3.70
9.0		4.25	4.25	4.30	3.30
10.0			3.50	3.75	3.00
11.0			2.90	3.20	2.70
12.0			2.45	2.75	2.50
13.0			2.05	2.35	2.30
14.0			1.85	2.05	2.10
15.0			(13.64m)	1.75	1.90
16.0				1.50	1.70
17.0				1.32	1.50
18.0				1.15	1.30
19.0				1.15	1.15
20.0				(18.1m)	1.00
21.0					0.90
22.0					0.80
22.7					0.74
Min boom angle	0°	0°	0°	0°	0°



Can stand and operate or pick and carry



Tel: 02 888 77888 Fax: 02 888 77877

Visit our website www.gillespiecranes.com.au




Our Strength is Service

6. SPECIFICATIONS AND TABULATED DATA

6.1 SPECIFICATIONS

The data described here are for reference. Since described values may sometimes different from those of the actual machine, use these data for reference only.

6.1.1 GENERAL DIMENSIONS

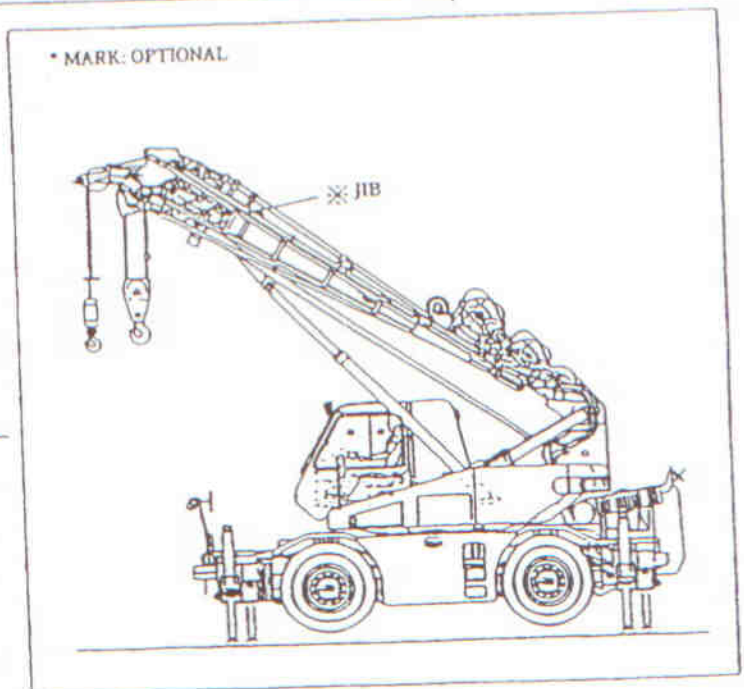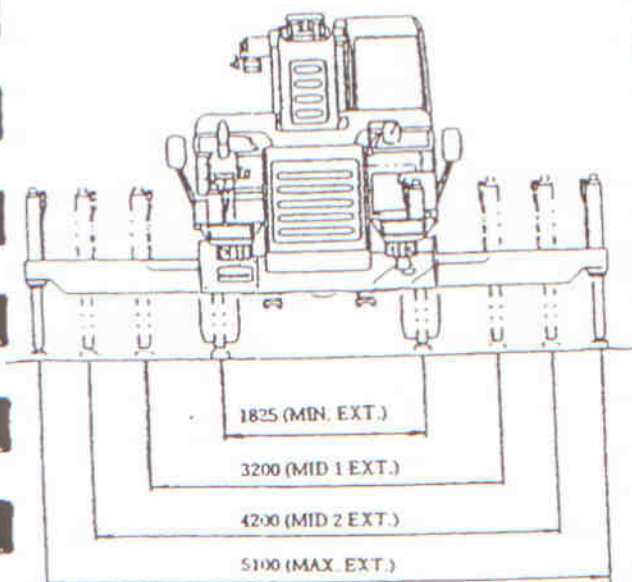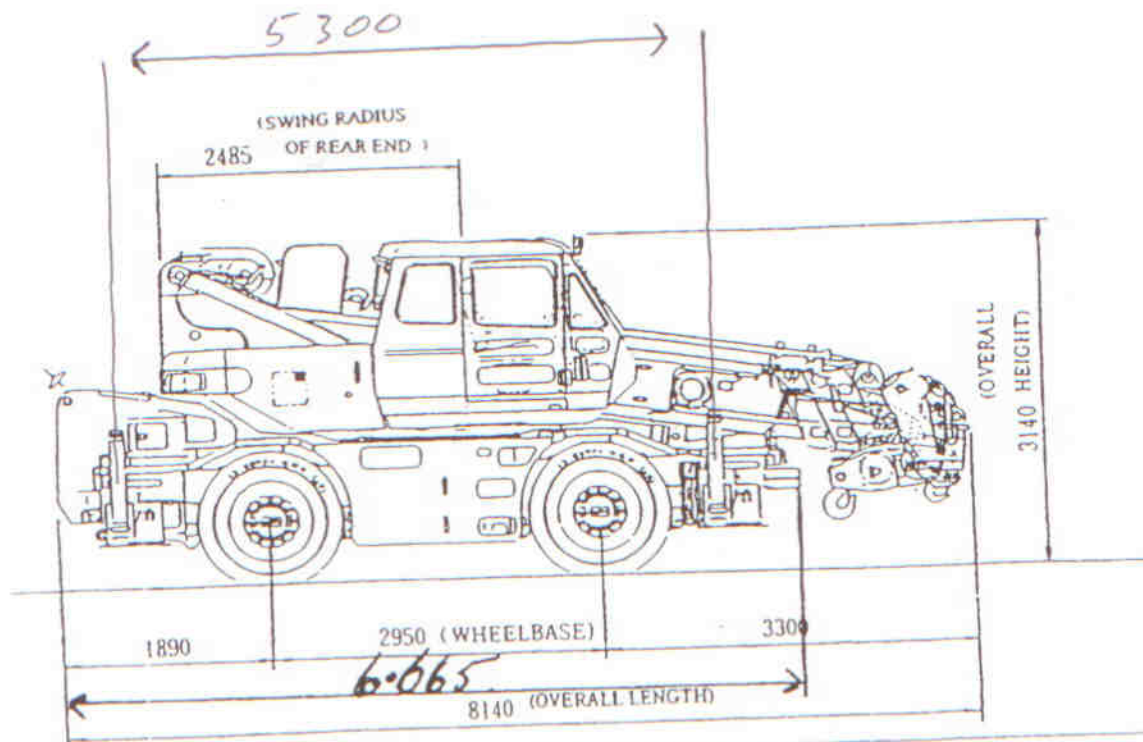

GENERAL DIMENSION (UNIT : mm)

* 19.5 TONNE .